Paged DryGuard







The mark of responsible forestry

ThickPly Baltic Pine plywood, surface treated with water-based coating to provide for water repellence (EN 927-5). Thanks to the special treatment the panel helps its users to save time during construction time. Its water-repellent surface reduces water absorption and does not hamper air permeability. The surface agent applied during manufacturing post processing slows down the rate of moisture penetration and helps maintain the rigidity and dimensional stability of the panel. In addition the coating protects the panel against fungal growth (EN 927-3).

KEY BENEFITS AND APPLICATIONS

- Main application areas include: construction, housing, campervan and mobile homes production, etc.
- Water repellent
- Dimensional stability and rigidity
- Air permeability
- Easy to machine and fasten
- Environmentally friendly coating (REACH compliant)
- CE2+ certified

NOMINAL THICKNESS WITH STANDARD DEVIATION, NUMBER OF PLIES, DENSITY AS PER EN 315, EN 323 & EN 324


| Nominal Thickness | Number of plies | Standard Deviation (mm) | | Weight | Density avg. |
|-------------------|-----------------|----------------------------|------|---------|--------------|
| (mm)* | (pcs) | | | (kg/m²) | (kg/m³) |
| 9 | 3 | -0,7 | +0,5 | 5,3 | |
| 12 | 5 | -0,8 | +0,6 | 7 | |
| 15 | 5 | -0,8 | +0,7 | 8,8 | |
| 18 | 7 | -1,0 | +0,7 | 10,5 | |
| 21 | 8 | -1,0 | +0,8 | 12,3 | |
| 24 | 9 | -1,1 | +0,9 | 14 | |
| 27 | 10 | -1,7 | +1,4 | 15,8 | |
| 30 | 11 | -1,9 | +1,5 | 17,6 | |

^{*}Other thicknesses available upon request

STANDARD SIZES* [mm]

2500x1250 2440x1220

*Other formats available on request

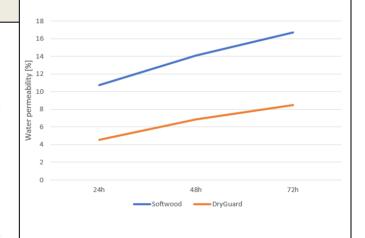

RELEASE OF FORMALDEHYDE (EN 717-1)

F1

The product also meets the limit ½ E1.

BONDING QUALITY (EN 314-2)

Class 3

ADDITIONAL SERVICES

- Edge machining, CNC machining and drilling on request
- Coating with a flame retardant preparation (Bs1d0 class)

ADDITIONAL INFORMATION

- .. General Terms of Sales available from www.skleikapaged.pl
- 2. Declaration of Performance available from

www.sklejkapaged.pl

Face veneer qualities according to EN 635-3.

^{**}As measured at 8-12% moisture content



