


Paged Twin Form

Hardwood plywood with thick-layer pine core faced with phenolic film

Hardwood plywood with thick-layer pine core, faced with phenolic film, designed for formwork and precast concrete applications, including the production of smaller elements such as paving stones or kerbs.

Paged Twin Form is an ideal choice for applications requiring high durability combined with reduced weight.

Plywood with a waterproof bond. The inner plies are made of softwood veneers, while the outer plies are composed of film-faced hardwood veneers.

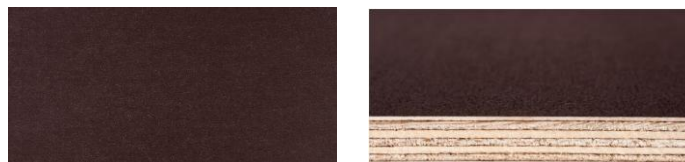

> Advantages:



Dimensional stability



Lighter construction



Ecological manufacturing process



Wear resistant



Moisture resistance



Increased chemical resistance



> Standard formats* [mm]

1250 x 2500
1220 x 2440

*Non-standard sizes available on request.


> Industries and applications:



Construction



Formwork systems



Formwork



Packaging



Trailers

> Technical specifications:

Reaction to fire class** [EN 13501-1]	D-s2, d0
Declaration of Performance (DoP)	Structural plywood; CE2+
Type of face	Phenolic film
Base weight:	167 g/m ² 220 g/m ²
Colour	Dark brown
Taber test [EN 438-2]	440 600
Number of cycles (uses)***	10–15

IMPORTANT! If the product is cut into smaller formats or otherwise modified, the edges must be re-sealed.

**without an air gap, for thicknesses of 9 mm and above

***the estimated number of uses of the formwork plywood is indicative only; the actual number of reuses depends on factors related to how the plywood is used and handled

› Thickness, number of layers, standard deviations, density [EN 315, EN 323, EN 324]

Nominal thickness* (mm)	Number of wood layers (pcs)	Minimum deviation from nominal thickness (mm)	Maximum deviation from nominal thickness (mm)	Weight (kg/m ²)	Average density** (kg/m ³)
9	5	-0.7	+0.5	5.4	605
12	5	-0.8	+0.6	7.3	
15	7	-0.9	+0.7	9.1	
18	8	-0.9	+0.7	10.9	
21	9	-1.0	+0.8	12.7	
24	10	-1.1	+0.9	14.5	
27	11	-1.8	+1.4	16.3	
30	12	-1.9	+1.5	18.2	
35	14	-1.5	+1.1	21.2	
40	16	-1.6	+1.2	24.2	

* other thicknesses and custom constructions available on request

** average density at 8–12% moisture content

› Characteristic values for bending strength and modulus of elasticity [EN 789:2005, EN 1058:2010]

Nominal thickness (mm)	Bending strength (MOR) [MPa]	MOE (Modulus of Elasticity) [Mpa]
15	II 33.10 ± 40.80	II 7089 ± 9309
18	II 33.80 ± 33.60	II 6473 ± 9352
21	II 32.20 ± 31.60	II 8531 ± 9327
24	II 34.30 ± 29.40	II 7786 ± 7732

› Characteristic values for bending strength and modulus of elasticity (EN 789:2005, EN 1058:2010) for other plywood thicknesses can be found in the Declaration of Performance (DoP) at www.pagedplywood.com

› Dimensional deviations of plywood [EN 315, EN 324]

Length / width	Deviation
< 1,000 mm	± 1 mm
1,000–2,000 mm	± 2 mm
> 2,000 mm	± 3 mm

› Edge straightness and squareness deviations [EN 315, EN 324]

Edge straightness and squareness	± 0.1% or ± 1 mm/m
----------------------------------	--------------------

› Standard formats*** [mm]

1250 x 2500 1220 x 2440

***Non-standard sizes available on request.

› Formaldehyde emission class [EN 717-1]



› Bonding quality class [EN 314-2]



› Processing

- Edge machining
- CNC machining
- Hole drilling according to customer specifications
- Cut-to-size service

› Additional information

1. General Terms of Sale
2. Declaration of Performance
3. Norms and standards
4. Surface classification catalogue for film-faced plywood

Scan the QR code or click the link:
www.pagedplywood.com

Paged

P L Y W O O D

PAGED Plywood S.A.

ul. Mazurska 1
14-300 Morąg, Poland

Helpline:

+48 87 425 48 00

pagedplywood.com



The parameters presented in the technical data sheet have been developed in accordance with the internal standards of PAGED Plywood S.A. and with reference to the requirements of EN 636 and other applicable plywood standards.

› Packaging

The plywood is stacked on pallets adapted to its dimensions. Depending on customer requirements and the method of transport, bundles are protected with cardboard and secured with strapping. The edges are protected with corner guards. The pallet height is 10–12 cm. Standard bundle heights are 60 cm and 40 cm (without pallet). The average pallet weight is 26–30 kg. Loading is carried out at the plant using forklifts. Trucks collecting the plywood must be suitable for side loading (with a minimum loading width of 2.50 m).

› Storage

Plywood sheets should be stored in a horizontal position. Do not place the sheets directly on the ground; store them on pallets that are larger than the sheets being stacked. Avoid storing plywood of different sizes, different wood species, or varying water-resistance levels in the same stack. The storage area should protect the plywood from direct exposure to water, excessive humidity, and sharp temperature changes. Plywood should be stored indoors, under controlled air parameters. Air conditioning of storage rooms is essential to balance moisture content and stresses within plywood sheets.

› Transport

During transport, plywood must be properly secured. Loading and unloading must be done in a way that prevents damage to the sheets. Vehicles transporting plywood should protect the load from water, moisture, and adverse weather conditions. Plywood bundles must be placed horizontally – stacked transport is permitted. Bundles must be secured with straps to prevent shifting during transport. Except for intermodal transport (in containers), plywood is transported using standard truck trailers that allow side unloading. The maximum load is 24 t gross (including packaging). For intermodal transport, higher values may apply.


Product Technical Data Sheet Updated on: 05/05/2026.

› Pallet height



Our standard pack height does not exceed 0.7 m.
/ Standardowa wysokość paczki nie przekracza 70 cm.
/ Die Standardhöhe der Packung überschreitet nicht 70 cm.

› Storage conditions

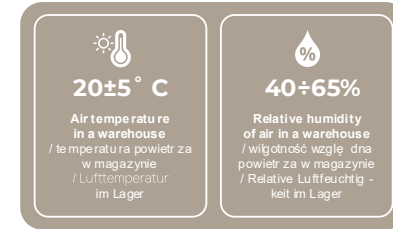

› Safety

All work must be carried out in accordance with occupational health and safety regulations.

› Supplementary documents

1. Technical Conditions
2. Plywood Storage Instructions
3. Safety Data Sheet

AVAILABLE ON REQUEST

Paged

P L Y W O O D

PAGED Plywood S.A.
ul. Mazurska 1
14-300 Morąg, Poland

Helpline:
+48 87 425 48 00

pagedplywood.com

