


# Paged Trans

Phenolic film-faced hardwood plywood with reinforced anti-slip pattern

Thin-layer hardwood plywood with a cross-banded design, finished with additional phenolic film offering enhanced anti-slip performance. Its special trans-embossed film provides maximum abrasion resistance, ensuring an exceptionally long service life. At the same time, it stands out for its excellent slip resistance and enhanced durability, including resistance to chemical agents.

The plywood is manufactured with a waterproof glue bond, in a cross-banded design. Inner plies may consist of hardwood veneers (homogeneous) or a mix of hardwood and softwood (combi).

For applications with higher durability requirements, it is possible to design and select a customised panel construction.

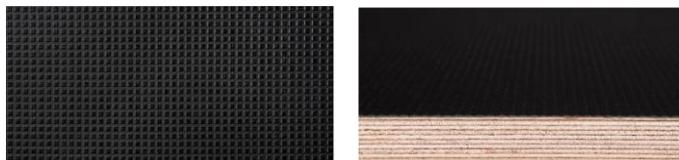

## > Advantages:

- Increased abrasion resistance
- Increased chemical resistance
- The best anti-slip properties
- High strength and wear resistance
- Ecological manufacturing process
- Dimensional stability



## > Standard formats\* [mm]

<b>1250 x 2500   1250 x 3000</b> <b>1500 x 2500   1500 x 3000</b>
--

\*Other formats available on request.

## > Industries and applications:

- Car transports
- Trailers
- Car bodies up to 3.5 T
- Industrial and warehouse floors
- Stage platforms and floors
- Buses
- Equipment for caravans and campers
- Versatile use

## > Technical specifications:

<b>Reaction to fire classification**</b> [EN 13501-1]	D-s2, d0
<b>Declaration of Performance (DoP)</b>	Structural plywood; CE2+
<b>Type of coating</b>	Phenolic film
<b>Base weight</b>	460 g/m <sup>2</sup>
<b>Colour</b>	Black
<b>Slip resistance rating [EN 16165 (DIN 51130)]</b>	R13
<b>Taber test [EN 438-2]</b>	8 000
<b>Rolling test [SS 923508]</b>	10 000 ± 35%

NOTE! If the product is modified by cutting into smaller formats, etc., the product requires re-sealing of the edges.

The product is available in the following versions: T/F.

\*\*without an air gap, for thicknesses of 9 mm and above

› Thickness, number of plies, standard deviations, and density [EN 315, EN 323, EN 324]

Nominal thickness* (mm)	Number of plies (pcs)	Minimum deviation from nominal thickness (mm)	Maximum deviation from nominal thickness (mm)	Weight (kg/m <sup>2</sup> )	Density avg.** (kg/m <sup>3</sup> )
12	9	-0,8	+0,6	8,4	640-760
15	11	-0,9	+0,7	10,5	
18	13	-0,9	+0,7	12,6	
21	15	-1,0	+0,8	14,7	
24	17	-1,1	+0,9	16,8	
27	19	-1,8	+1,4	18,9	
30	21	-1,9	+1,5	21,0	
35	25	-1,5	+1,1	24,5	

\* other thicknesses and custom constructions available on request

\*\* density at 8–12% moisture content

› Characteristic values for bending strength and modulus of elasticity [EN 789:2005, EN 1058:2010]

Nominal thickness (mm)	Bending strength (MOR) [MPa]	MOE (Modulus of Elasticity) [Mpa]
21	II 44,20 ± 40,70	II 9216 ± 6066
24	II 41,20 ± 45,40	II 9274 ± 9349
27	II 36,90 ± 37,10	II 9349 ± 7823
30	II 44,70 ± 45,00	II 10163 ± 8707

› Characteristic values for bending strength and modulus of elasticity (EN 789:2005, EN 1058:2010) for other plywood thicknesses can be found in the Declaration of Performance (DoP) at [www.pagedplywood.com](http://www.pagedplywood.com)

› Dimensional deviations of plywood [EN 315, EN 324]

Length / width	Deviation
< 1000 mm	± 1 mm
1000 – 2000 mm	± 2 mm
> 2000 mm	± 3 mm

› Edge straightness and squareness deviations [EN 315, EN 324]

Edge straightness and squareness	± 0,1% lub ± 1 mm/m
----------------------------------	---------------------

› Standard formats\*\*\* [mm]

1250 x 2500   1250 x 3000 1500 x 2500   1500 x 3000
--

\*\*\*Non-standard sizes available on request.

› Formaldehyde emission class [EN 717-1]

E1

› Bonding quality class [EN 314-2]

CLASS 3

› Processing

- Edge machining
- CNC machining
- Hole drilling according to customer specifications
- Cut-to-size service

› Additional information

1. General Terms of Sale
2. Declaration of Performance
3. Norms and standards
4. Surface classification catalogue for film-faced plywood

Scan the QR code or click the link:  
[www.pagedplywood.com](http://www.pagedplywood.com)

# Paged

P L Y W O O D

**PAGED Plywood S.A.**

ul. Mazurska 1  
14-300 Morąg, Poland

**Helpline:**

+48 87 425 48 00

[pagedplywood.com](http://pagedplywood.com)



## › Packaging

The plywood is stacked on pallets adapted to its dimensions. Depending on customer requirements and the method of transport, bundles are secured with cardboard and strapped with tape. The edges are protected with corner guards. The pallet height is 10-12 cm. Standard bundle heights are 60 cm and 40 cm (without pallet). The average pallet weight is 26–30 kg (except for the 1,500 × 3,000 mm format – approx. 46 kg). Loading is carried out at the plant using forklifts. Trucks collecting the plywood must be suitable for side loading (with a minimum loading width of 2.50 m).

## › Storage

Plywood sheets should be stored in a horizontal position. Do not place the sheets directly on the ground; store them on pallets that are larger than the sheets being stacked. Avoid storing plywood of different sizes, different wood species, or varying water-resistance levels in the same stack. The storage area should protect the plywood from direct exposure to water, excessive humidity, and sharp temperature changes. Plywood should be stored indoors, under controlled air parameters. Air conditioning of storage rooms is essential to balance moisture content and stresses within plywood sheets.

## › Transport

During transport, plywood must be properly secured. Loading and unloading must be done in a way that prevents damage to the sheets. Vehicles transporting plywood should protect the load from water, moisture, and adverse weather conditions. Plywood bundles must be placed horizontally – stacked transport is permitted. Bundles must be secured with straps to prevent shifting during transport. Except for intermodal transport (in containers), plywood is transported using standard truck trailers that allow side unloading. The maximum load is 24 t gross (including packaging). For intermodal transport, higher values may apply.

Product Technical Data Sheet Updated on: 27/02/2025

## › Pallet height



Our standard pack height does not exceed 0.7 m.  
/ Standardowa wysokość paczki nie przekracza 70 cm.  
/ Die Standardhöhe der Packung überschreitet nicht 70 cm.

## › Storage conditions



## › Safety

All work must be carried out in accordance with occupational health and safety regulations.

## › Supplementary documents

1. Technical Conditions
2. Plywood Storage Instructions
3. Safety Data Sheet

AVAILABLE ON REQUEST

# Paged

P L Y W O O D

**PAGED Plywood S.A.**

ul. Mazurska 1  
14-300 Morąg, Poland

**Helpline:**

+48 87 425 48 00

[pagedplywood.com](http://pagedplywood.com)

